

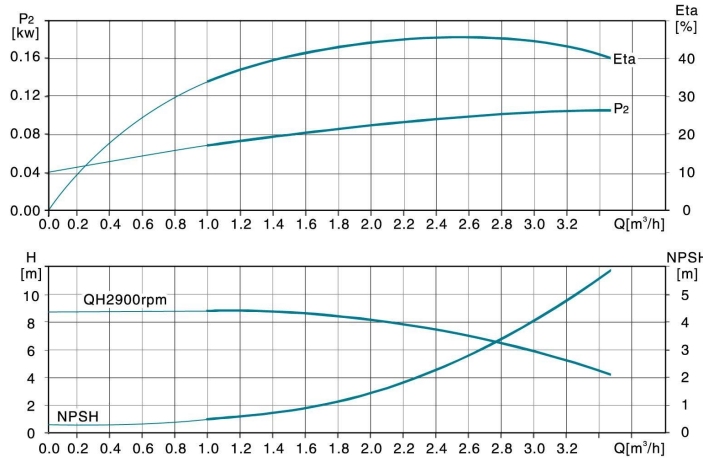


Hydraulic Performance Curves

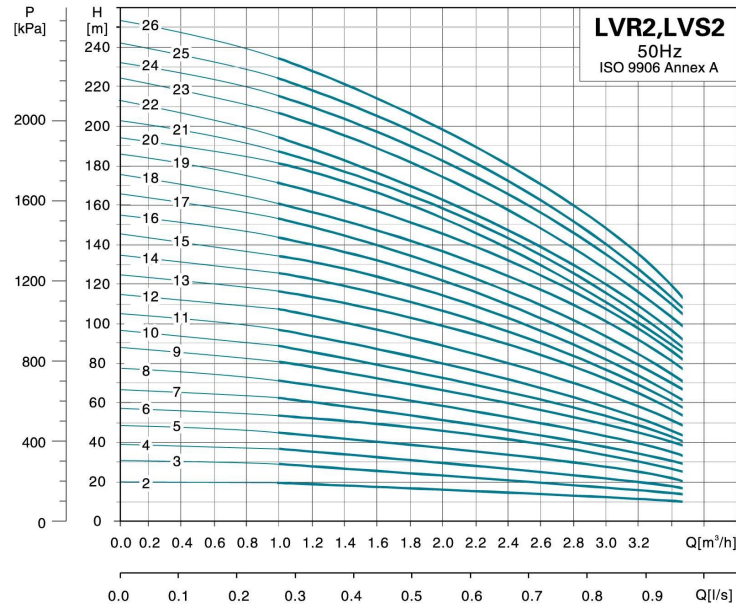

Available with:

Dimension Drawing

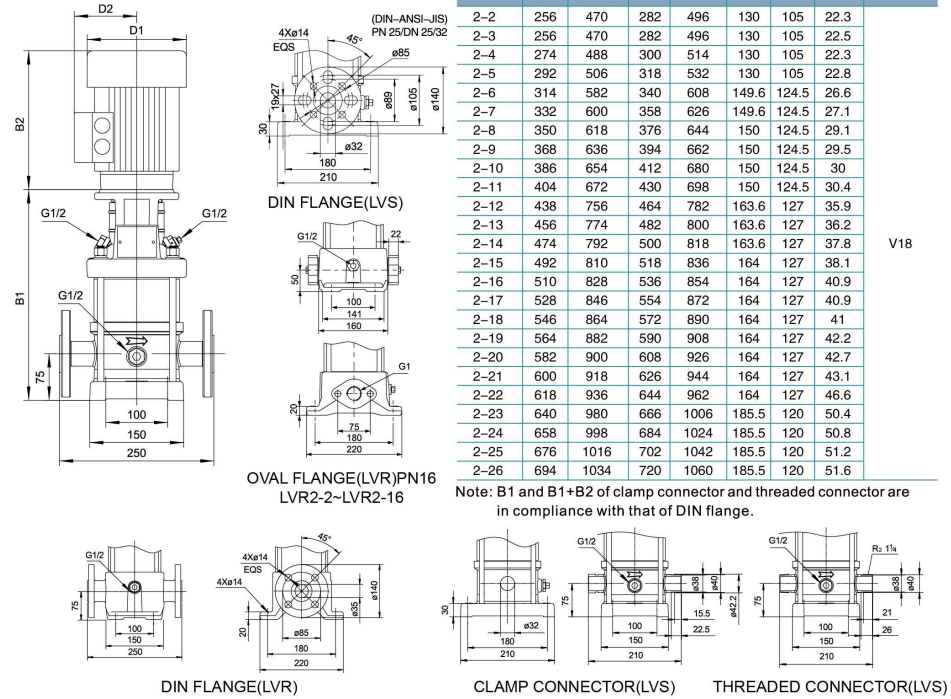

MODEL	OVAL FLANGE (LVR)		DIN FLANGE (LVR, LVS)		D1	D2	N.W. (kgs)	Motor Mounting Code
	B1	B1+B2	B1	B1+B2				
2-2	256	470	282	496	130	105	22.3	V18
2-3	256	470	282	496	130	105	22.5	
2-4	274	488	300	514	130	105	22.3	
2-5	292	506	318	532	130	105	22.8	
2-6	314	582	340	608	149.6	124.5	26.6	
2-7	332	600	358	626	149.6	124.5	27.1	
2-8	350	618	376	644	150	124.5	29.1	
2-9	368	636	394	662	150	124.5	29.5	
2-10	386	654	412	680	150	124.5	30	
2-11	404	672	430	698	150	124.5	30.4	
2-12	438	756	464	782	163.6	127	35.9	
2-13	456	774	482	800	163.6	127	36.2	
2-14	474	792	500	818	163.6	127	37.8	
2-15	492	810	518	836	164	127	38.1	
2-16	510	828	536	854	164	127	40.9	
2-17	528	846	554	872	164	127	40.9	
2-18	546	864	572	890	164	127	41	
2-19	564	882	590	908	164	127	42.2	
2-20	582	900	608	926	164	127	42.7	
2-21	600	918	626	944	164	127	43.1	
2-22	618	936	644	962	164	127	46.6	
2-23	640	980	666	1006	185.5	120	50.4	
2-24	658	998	684	1024	185.5	120	50.8	
2-25	676	1016	702	1042	185.5	120	51.2	
2-26	694	1034	720	1060	185.5	120	51.6	

Note: B1 and B1+B2 of clamp connector and threaded connector are in compliance with that of DIN flange.

MODEL	POWER[kW]	Q[m³/h]	1.0	1.2	1.6	2.0	2.5	2.8	3.2	3.5
LVR(S)2-2	0.37	18	17	16	15.5	13.5	12	10	8	
LVR(S)2-3	0.37	27	26	24	22.5	19.5	18	15	12	
LVR(S)2-4	0.55	36	35	33	30.5	27	24	17	16	
LVR(S)2-5	0.55	45	43	40	37	32.5	30	24	20	
LVR(S)2-6	0.75	53	52	50	45.5	40	36	30	24	
LVR(S)2-7	0.75	63	61	57	52	45.5	41	35	28	
LVR(S)2-8	1.1	71	69	65	59	51	47	40	33	
LVR(S)2-9	1.1	80	78	73	68.5	60	54	45	37	
LVR(S)2-10	1.1	89	86	81	74	65	59	49	40	
LVR(S)2-11	1.1	98	95	89	82	71.5	64	54	44	
LVR(S)2-12	1.5	107	103	97	90	78	71	59	47	
LVR(S)2-13	1.5	116	114	106	98	86.5	78	65	52	
LVR(S)2-14	1.5	125	122	114	105	92	84	69	57	
LVR(S)2-15	1.5	134	130	123	112	98	90	73	60	
LVR(S)2-16	2.2	143	139	131	120	104	96	79	66	
LVR(S)2-17	2.2	152	148	139	128	111	102	85	70	
LVR(S)2-18	2.2	161	157	148	136	122	108	91	76	
LVR(S)2-19	2.2	170	165	156	143	128	113	95	81	
LVR(S)2-20	2.2	179	174	164	150	134	119	100	85	
LVR(S)2-21	2.2	188	183	172	157	140	124	105	88	
LVR(S)2-22	2.2	197	192	180	165	145	130	110	90	
LVR(S)2-23	3.0	205	201	188	173	153	137	105	97	
LVR(S)2-24	3.0	214	210	197	181	160	144	120	105	
LVR(S)2-25	3.0	223	219	205	189	168	151	125	107	
LVR(S)2-26	3.0	232	228	214	198	176	158	130	110	