



# Multiport Valve 0225



## Technical Specification

- Inlet/Outlet/drain connection : 1" BSPF
- Valve threading for vessel mounting : 2.5" NPSM
- Flow Rate : 2m<sup>3</sup>/hr @ 0.35 kg/cm<sup>2</sup>
- Max. Operating Pressure : 5kg/cm<sup>2</sup>
- Ejector Suction at 2 kg/cm<sup>2</sup> : 170 Lt/hr


**FILTRA CONSULTANTS AND ENGINEERS LTD.**

Gala No. 2 & 3, Ground Floor, Neminath Industrial Estate No. 2, Navghar, Vasai (East), Dist.: Palghar - 401 219  
Tel.: +91 8691009127/26 Email: [filtraw@gmail.com](mailto:filtraw@gmail.com) Website: [www.ewater-treatmentindia.com](http://www.ewater-treatmentindia.com)





# Multiport Valve 0225

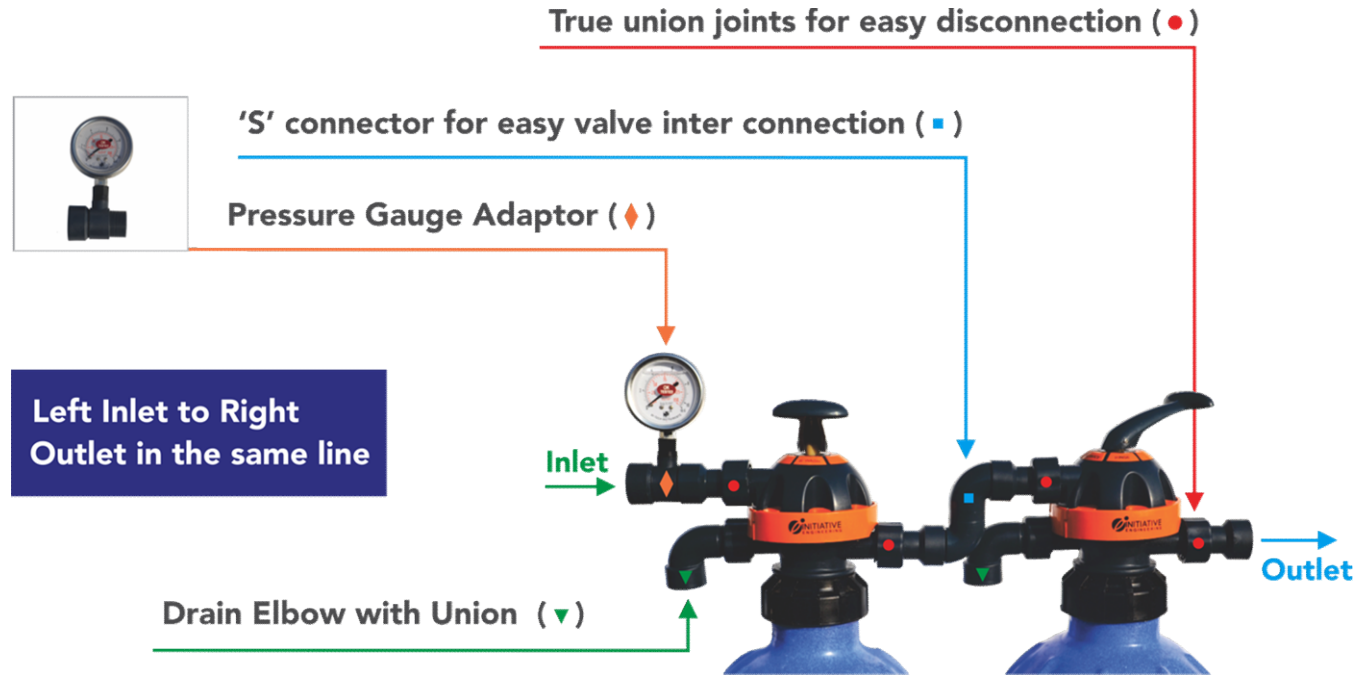

**FILTRA CONSULTANTS AND ENGINEERS LTD.**

Gala No. 2 & 3, Ground Floor, Neminath Industrial Estate No. 2, Navghar, Vasai (East), Dist.: Palghar - 401 219  
Tel.: +91 8691009127/26 Email: [filtraw@gmail.com](mailto:filtraw@gmail.com) Website: [www.ewater-treatmentindia.com](http://www.ewater-treatmentindia.com)

