



Multiport Valve 0525



Technical Specification

- Inlet/Outlet/drain connection : 1" BSPF
- Valve threading for vessel mounting : 2.5" NPSM
- Flow Rate : 5m³/hr @ 0.35 kg/cm²
- Max. Operating Pressure : 5kg/cm²
- Ejector Suction at 2 kg/cm² : 450 Lt/hr


FILTRA CONSULTANTS AND ENGINEERS LTD.

Gala No. 2 & 3, Ground Floor, Neminath Industrial Estate No. 2, Navghar, Vasai (East), Dist.: Palghar - 401 219
Tel.: +91 8691009127/26 Email: filtraw@gmail.com Website: www.ewatertreatmentindia.com





Multiport Valve 0525

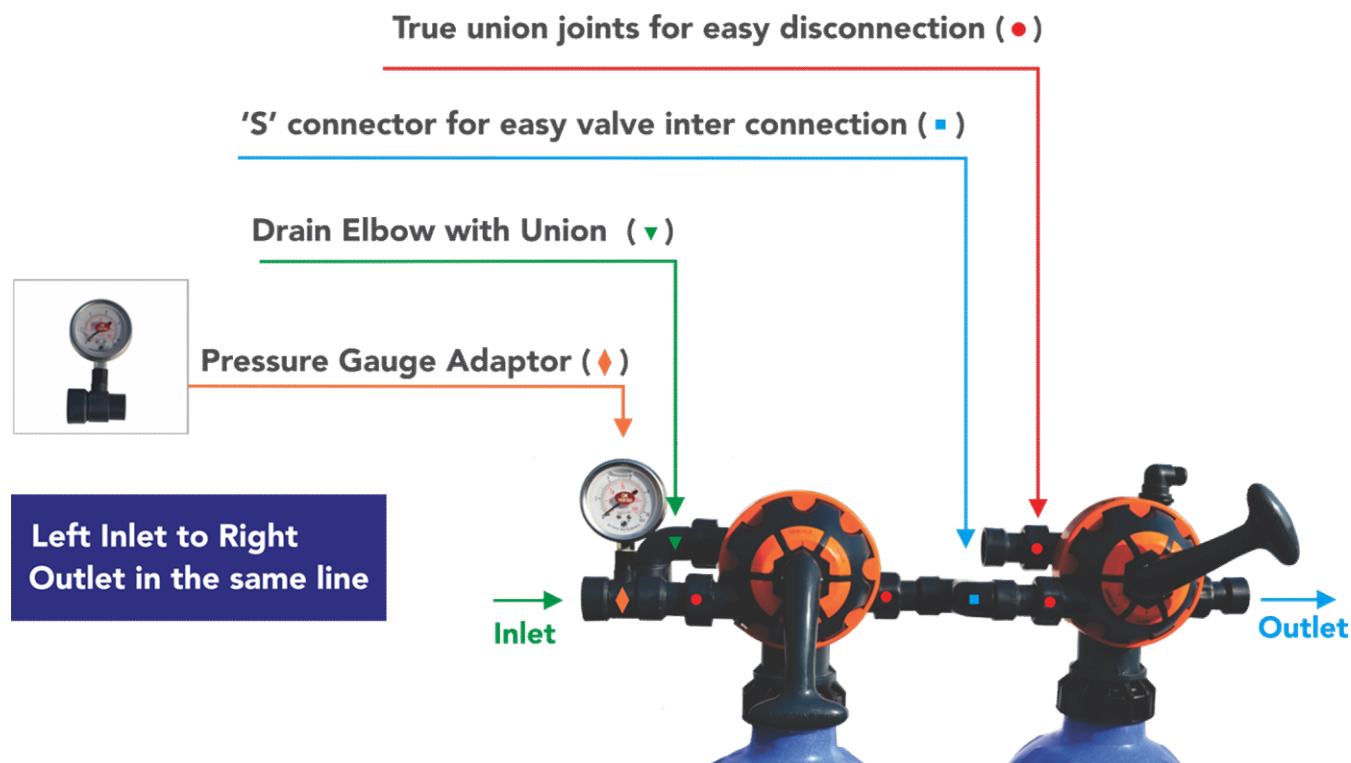

FILTRA CONSULTANTS AND ENGINEERS LTD.

Gala No. 2 & 3, Ground Floor, Neminath Industrial Estate No. 2, Navghar, Vasai (East), Dist.: Palghar - 401 219
Tel.: +91 8691009127/26 Email: filtraw@gmail.com Website: www.ewater treatmentindia.com

